

NOLAN COLLECTION

SKU: NOLAN-COLLECTION




QUOTE:
PROJECT:
TYPE:

The Gentech Nolan collection features stylish white trimmed LED recessed downlights, with adjustable colour temperature. This multi purpose downlight is suited for indoor settings with its IP44 rating and includes a 50,000 hour lifespan with a 3 year warranty.

Features & Benefits

- Built in colour temperature switch: Choose from 3000K, 4000K and 5700K
- 3 year warranty
- 50,000 Lifespan
- IP44
- Flex & Plug



PRODUCT IMAGE

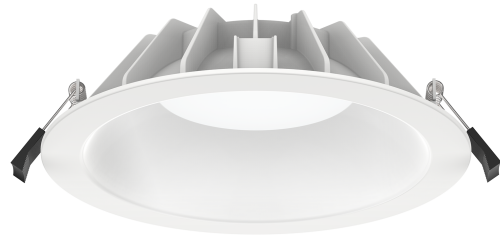

NOLAN COLLECTION

SKU: NOLAN-COLLECTION



PRODUCT IMAGES & DIMENSIONS

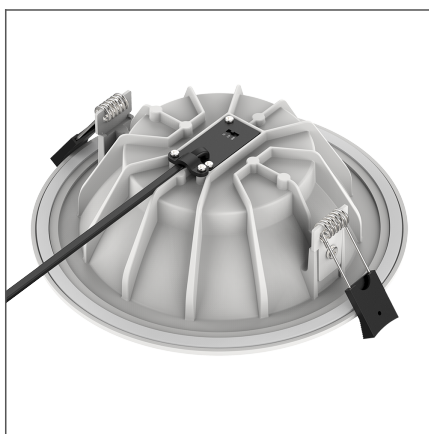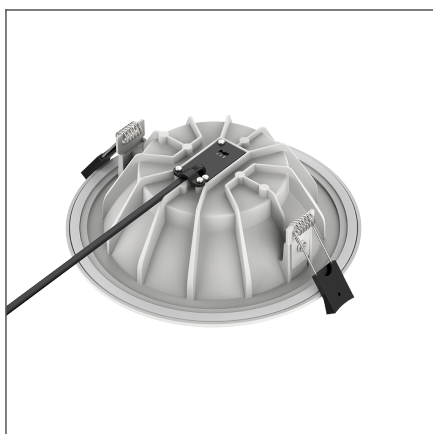

GDL-21680-1-CCT

GDL-21670-1-CCT

GDL-21640-1-CCT

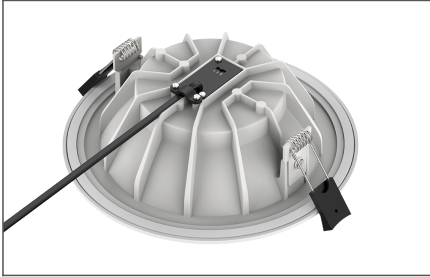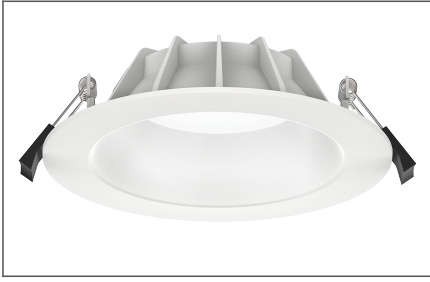

GDL-21650-1-CCT

NOLAN COLLECTION

SKU: NOLAN-COLLECTION

SPECIFICATIONS

SKU	GDL-21680-1-CCT	GDL-21670-1-CCT	GDL-21640-1-CCT	GDL-21650-1-CCT
Luminaire efficacy	100 lm/W	100 lm/W	100 lm/W	100 lm/W
Light Colour	3CCT	3CCT	3CCT	3CCT
Wattage	33 W	25 W	13 W	20 W
Lumen output	2836, 3209, 3204 lm	2282, 2594, 2506 lm	1117, 1266 lm	1672, 1925, 1863 lm
IP rating	44	44	44	44
CRI	80	80	80	80
Beam Angle	90 Degrees	90 Degrees	90 Degrees	90 Degrees
Trim colour	White	White	White	White
Cut out	205-215 mm	175-190 mm	120-140 mm	145-160 mm
Diameter	228 mm	203 mm	152 mm	175 mm
Height	63 mm	56 mm	48 mm	52 mm
Lifespan	50000 Hours	50000 Hours	50000 Hours	50000 Hours
Warranty	3 Years	3 Years	3 Years	3 Years
Dimmable	Dimmable	Dimmable	Dimmable	Dimmable
Constant current/voltage	Constant Current	Constant Current	Constant Current	Constant Current
Shatterproof	Shatterproof	Shatterproof	Shatterproof	Shatterproof
Mounting type	Recessed	Recessed	Recessed	Recessed
LED source	SMD	SMD	SMD	SMD
Material	Aluminum	Aluminum	Aluminum	Aluminum
Lamp Type	LED	LED	LED	LED
Dimming	Triac-Dimming	Triac-Dimming	Triac-Dimming	Triac-Dimming
Input voltage	200---240V-AC	200---240V-AC	200---240V-AC	200---240V-AC
Diffuser	Opal	Opal	Opal	Opal
Wiring method	Flex & Plug or Hardwire	Flex & Plug or Hardwire	Flex & Plug or Hardwire	Flex & Plug
Weatherproof	Weatherproof	Weatherproof	Weatherproof	Weatherproof
Working temperature	20°C ~ 45°C	20°C ~ 45°C	20°C ~ 45°C	20°C ~ 45°C
Kelvin	3000K/4000K/5700K	3000K/4000K/5700K	3000K/4000K/5700K	3000K/4000K/5700K

