



ROTARY DIMMER SWITCH 150W MAX FOR LED FITTINGS


VB-DT-200A1-R-V2



The VB-DT-200A1-R-V2 is a high-performance trailing-edge dimmer designed for smooth, flicker-free dimming of compatible LED, incandescent, and halogen loads. It features adjustable minimum brightness for optimal performance and complies with AS/NZS and International EMC standards. The mechanism is not polarity sensitive and fits standard Australian wall plates.

Features & Benefits

- Adjustable minimum brightness setting
- Trailing-edge dimming technology
- Flicker-free operation
- Complies with AS/NZS standards
- Suitable for LED, incandescent, and halogen lamps
- LED: Up to 150W
- Incandescent / Halogen: 350W
- Soft-start for increased lamp and driver life

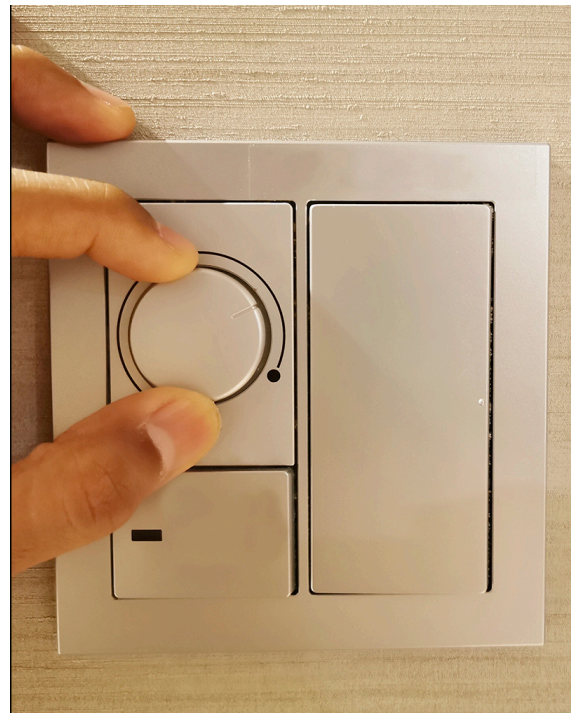

ROTARY DIMMER SWITCH 150W MAX FOR LED FITTINGS

VB-DT-200A1-R-V2

Specifications

SKU	VB-DT-200A1-R-V2
EAN	9359682003221
Weight	0.22
Wattage	150W FOR LED W
IP rating	20
Trim colour	White
Length	23 mm
Width	23 mm
Height	55 mm
Warranty	3 Years
Dimmable	Dimmable
Dimming	Triac Dimmable
Input voltage	220-240V AC 50Hz
Wiring method	Hardwire
Weatherproof	Indoor Use Only
Working temperature	-20°C ~ 45°C
Box Qty	1
Pallet Qty	1000



Photometric information available upon request.

- *Designed to dim down to zero brightness without fully switching off the load.*
- *Must not be connected in parallel or series with another dimmer to control the same circuit.*
- *Minimum load 5VA for LED*
- *Minimum load 10VA for Incandescent*