

VB-DT-200A1-R-V2


ROTARY DIMMER SWITCH 150W MAX FOR LED FITTINGS

Experience smooth, precise light control with our Trailing Edge Rotary Dimmer, engineered for modern dimmable LED lighting. Advanced trailing-edge technology delivers silent, flicker-free performance while protecting fittings from overload and premature wear.

Ideal for hallways and staircases. Designed for compatible LED, incandescent and halogen loads, it features adjustable minimum brightness for optimal stability. The mechanism is non-polarity sensitive, fits standard Australian wall plates, and complies with AS/NZS and international EMC standards.

KEY FEATURES

- Adjustable minimum brightness setting
- Trailing-edge dimming technology
- Flicker-free operation
- Complies with AS/NZS standards
- Suitable for LED, incandescent, and halogen lamps
- LED: Up to 150W
- Incandescent / Halogen: 350W
- Soft-start for increased lamp and driver life

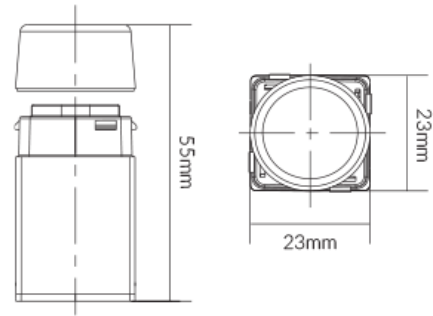

SPECIFICATIONS

SKU	VB-DT-200A1-R-V2
Power (W)	150W (LED) / 400W (Halogen)
Dimmable	Triac Dimmable
IP Rating	20
Trim Colour	White
Weatherproof	Indoor Use Only
Height (MM)	55
Length (MM)	23
Width (MM)	23
Working Temp	-20°C ~ 45°C
Warranty (YRS)	3

APPLICATION



ADDITIONAL INFORMATION

- Designed to dim down to zero without switching off.
- Do not connect in series or parallel with another dimmer.
- Minimum load: 5 VA (LED), 10 VA (Incandescent).