



510 Series

VBLDL-510-1-40



These architecturally designed fittings provide a smooth & uniform light output through a high transmittance PMMA diffuser for flush or low glare installation and environmentally friendly EPISTAR LED chips.

Features & Benefits

- Equipped with high efficiency EPISTAR LED chips
- Smooth and uniform light output through high transmittance PMMA diffuser
- Dimmable with most trailing edge dimmers
- IP44 front only
- 50,000 hour lifespan
- 3 Year warranty




Specifications

SKU	VBLDL-510-1-40
Luminaire efficacy	93.78 lm/W
EAN	9340994017112
Light Colour	Cool White
Wattage	45 W
Lumen output	4220 lm
IP rating	44
CRI	80
Beam Angle	90 Degrees
Trim colour	White
Cut out	230-260 mm
Diameter	280 mm
Lifespan	50000 Hours
Warranty	3 Years
Dimmable	Dimmable
Mounting type	Recessed
LED source	Epistar
Material	Aluminium
Lamp Type	LED
Dimming	Triac Dimming
Input voltage	220V-265V AC 50hz
Wiring method	Flex & Plug
Weatherproof	Indoor Use Only
Working temperature	-20°C ~ 45°C
Kelvin	4000K



Dimensional Drawings

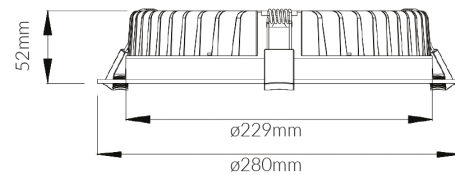

Cut Out: 230mm - 260mm 

Photometric information available upon request.