



## 9W LED DOWNLIGHT 90MM 60D 3CCT DIM 800LM 3K/4K/5K IP54

### VBLDL-800-4-CCT



Designed for general lighting applications. This IC-4 ( IC-F ) rated integrated downlight has the capacity to offer a wide choice of options. Switchable to a range of 3 colour temperatures. Comes with 1.2mAus flex & plug. Has a 50,000 hour lifespan and comes with a 3 year warranty.

### Features & Benefits

- Wide range of applications ranging from residential homes to office spaces, retail spaces, shops, reception areas and more
- 3CCT colour switchable
- 300K, 4000K, 5000K
- 1.2mAus flex & plug
- 50,000 hour lifespan • 3 year warranty



9W LED DOWNLIGHT 90MM 60D 3CCT DIM 800LM 3K/4K/5K IP54


VBLDL-800-4-CCT

Specifications

|                          |                       |
|--------------------------|-----------------------|
| SKU                      | VBLDL-800-4-CCT       |
| Luminaire efficacy       | 88 lm/W               |
| EAN                      | 9340994027807         |
| Light Colour             | 3CCT                  |
| Wattage                  | 9 W                   |
| Lumen output             | 800 lm                |
| IP rating                | 54                    |
| CRI                      | 80                    |
| Beam Angle               | 60 Degrees            |
| Trim colour              | Black                 |
| Cut out                  | 90 mm                 |
| Diameter                 | 100 mm                |
| Lifespan                 | 30000 Hours           |
| Warranty                 | 3 Years               |
| Dimmable                 | Dimmable              |
| Constant current/voltage | Constant Current      |
| Mounting type            | Recessed              |
| LED source               | SMD                   |
| Material                 | Plastic and Aluminium |
| Lamp Type                | LED                   |
| Dimming                  | Triac Dimming         |
| Input voltage            | 220V-240V AC 50HZ     |
| Wiring method            | Flex & Plug           |
| Weatherproof             | Indoor Use Only       |
| Working temperature      | -20°C ~ 45°C          |
| Box Qty                  | 45                    |
| Kelvin                   | 300K, 4000K, 5000K    |



Dimensional Drawings

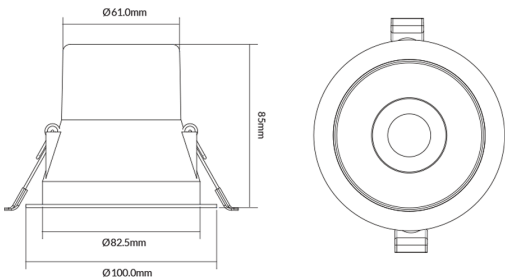

Photometric information available upon request.