VIBE LIGHTING
quality · innovation · value



VBLDL-800-SERIES

9W 3CCT LED DOWNLIGHTS (UGR<19)

Designed for modern interiors, the 800 Series LED Downlights are available in recessed, surface-mounted and gimbal options, combining sleek aesthetics with superior functionality. Delivering consistent style and performance, these 9W LED downlights feature a unique heat-sink design for enhanced thermal management and long-lasting reliability.

The range provides a sleek, professional look with low-glare illumination (UGR <19), making it perfect for residential areas, offices, aged care and healthcare facilities, hotels, lobbies, hospitality venues, retail spaces, and showrooms.





KEY FEATURES

- 3CCT Switchable – 3000K/4000K/5000K
- Unique heat-sink design for excellent heat dissipation
- UGR<19: low glare & soft light
- IC-4 rated (abutted & covered)
- Dimmable with most trailing edge dimmers
- Supplied with 1.2M Aus flex & plug
- IP54 rated (Face Only)
- 30,000 hour lifespan
- 3 year warranty

VBLDL-800-SERIES

9W 3CCT LED DOWNLIGHTS (UGR<19)







SPECIFICATIONS


SKU	VBLDL-800-1/4-CCT	VBLDL-810-1-CCT	VBLDL-800-1/4-SM*
Power (W)	9	9	-
Lumens (LM)	800	800	-
Colour Temp	3CCT Switchable	3CCT Switchable	-
Kelvin	3000K/4000K/5000K	33000K/4000K/5000K	-
Dimmable	Yes	Yes	-
CRI	80	80	-
Cut Out (MM)	90	90	-
Beam Angle	120	120	-
IP Rating	54 (Face Only)	54 (Face Only)	-
Trim Colour	White/Black	White	White/Black
Weatherproof	Indoor Use Only	Indoor Use Only	Indoor Use Only
Mounting Type	Recessed	Recessed	Surface Mounted
Diameter (MM)	Ø100	Ø100	Ø100
Height (MM)	85	85	110
Working Temp	-20°C ~ 40°C	-20°C ~ 40°C	-
Lifespan (HRS)	30,000	30,000	-
Warranty (YRS)	3	3	-

*Surface mounted *VBLDL-800-1/4-SM sold separately. Compatible only with VBLDL-800-1/4-CCT models.*

ADDITIONAL INFORMATION

Recommended Dimmers:


VB-DT-150R-PB





VB-DT-200A1-R-V2



DIMENSIONAL DRAWING

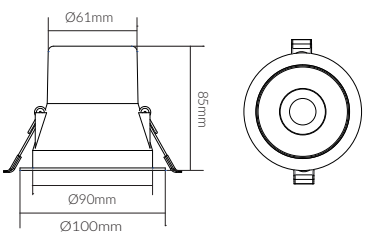





VIBE LIGHTING
quality · innovation · value