



LED FLOODLIGHT 100/80/60W SWITCHABLE 4K TYPE II BEAM RA80 0-10V 6KV SURGE PROTECTION

VBLFL-100W-4-4KPA



Light up your space your way with our versatile Floodlight – designed with switchable wattage for ultimate flexibility. With the flick of a switch, choose between 60W, 80W or 100W of powerful Cool White light output to suit your needs. Featuring a Type II beam, RA80 colour rendering, 0-10V dimming compatibility and built-in 6KV surge protection, this floodlight delivers performance, reliability and control in one sleek solution.

Features & Benefits

- Power Adjustable - 100/80/60W
- Various Surge Protection (Varies as per the wattage – 6KV to 30KV) • Asymmetric beam spread (forward throw) • 0-10v Dimming • Advanced input under/over voltage protection for improved reliability
- Die-cast aluminium housing for efficient heat dissipation, paired with 4mm tempered glass for high light transmittance.
- Breather valve equalises pressure to prevent internal condensation
- Comes complete with 1.5M flex & plug
- IP65 & IK08 rated
- 50,000 hour lifespan
- 5 year warranty



LED FLOODLIGHT 100/80/60W SWITCHABLE 4K TYPE II BEAM RA80 0-10V 6KV SURGE PROTECTION


VBLFL-100W-4-4KPA

Specifications

SKU	VBLFL-100W-4-4KPA
Luminaire efficacy	145 lm/W
EAN	9340994032566
Weight	2.1
Light Colour	Cool White
Wattage	100/80/60 W
Lumen output	14500/11600/8700 lm
IP rating	65
IK Rating	8
CRI	80
Beam Angle	90 Degrees
Trim colour	Black
Width	215 mm
Height	325 mm
Lifespan	50000 Hours
Warranty	5 Years
Dimmable	0-10V
Mounting type	Surface
LED source	SMD
Material	Aluminum
Lamp Type	LED
Input voltage	220-240V AC 50Hz
Wiring method	Flex & Plug or Hardwire
Weatherproof	Weatherproof
Working temperature	-20°C ~ 45°C
Box Qty	1
Depth	112
Kelvin	4000K
Power Adjustable	Yes



Dimensional Drawings

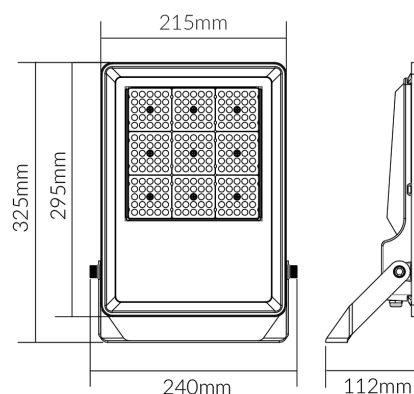

Photometric information available upon request.