



## 100W/70W/50W LED FLOOD LIGHT

### VBLFL-100W-4-PACCT



100W/70W/50W Wattage adjustable LED Flood 3K/4K/6K CCT  
ADJUSTABLE IP65 With 1.5M Flex & Plug

#### Features & Benefits

- Advanced input under/over voltage protection for improved reliability
- Equipped with SMALITE high voltage LED chips
- 4mm tempered glass, high light transmittance
- Breather valve allows to adjust the floodlights capacity pressure to avoid the formation of water vapour inside the fitting
- Wattage and Colour Temperature selectable via dip switch
- Optional plug and play PIR sensor with remote control
- Comes complete with 1.5M flex & plug
- IP65 rated
- 50,000 hour lifespan
- 3 year warranty



# 100W/70W/50W LED FLOOD LIGHT


## VBLFL-100W-4-PACCT

### Specifications

| SKU                 | VBLFL-100W-4-PACCT       |
|---------------------|--------------------------|
| Luminaire efficacy  | 110-130 lm/W             |
| EAN                 | 9340994030586            |
| Weight              | 1.23                     |
| Light Colour        | 3CCT                     |
| Wattage             | 100W/70W/50W W           |
| Lumen output        | 11000-13000 lm           |
| IP rating           | 65                       |
| CRI                 | 70                       |
| Beam Angle          | 120 Degrees              |
| Trim colour         | Black                    |
| Length              | 225.2 mm                 |
| Width               | 35.9 mm                  |
| Height              | 184.9 mm                 |
| Lifespan            | 50000 Hours              |
| Warranty            | 3 Years                  |
| Dimmable            | Non-Dimmable             |
| Mounting type       | Surface                  |
| LED source          | SMD                      |
| Material            | ALUMINIUM                |
| Accessories         | Plug and Play PIR Sensor |
| Lamp Type           | LED                      |
| Input voltage       | 220V-240V AC 50HZ        |
| Wiring method       | Flex & Plug              |
| Weatherproof        | Weatherproof             |
| Working temperature | -30°C~45°C               |
| Box Qty             | 12                       |
| Kelvin              | 3000K/4000K/6000K        |
| Power Adjustable    | Yes                      |



### Dimensional Drawings

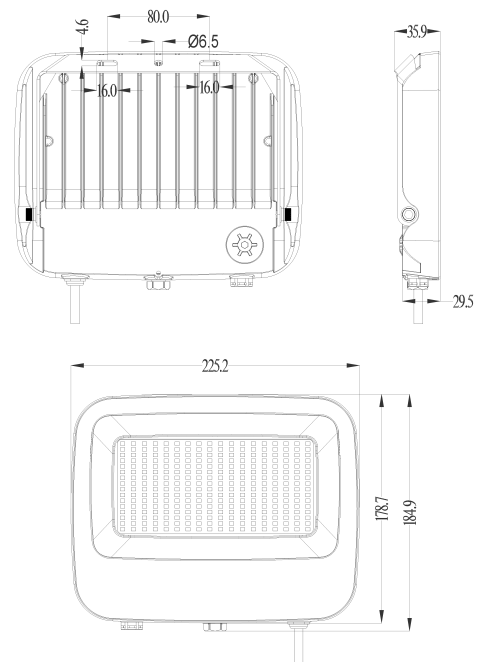

Photometric information available upon request.

Optional Plug and Play PIR Sensor with Remote Control. Preset at 100W.