



## 500 Series

### VBLFL-150W-4-40



Vibe 150W LED Flood 4K IP65 with 2M Flex & Plug

#### Features & Benefits


- Advanced input under/over voltage protection for improved reliability
- Equipped with SMALITE high voltage LED chips
- Available in Black trim only
- Breather valve allows to adjust the floodlights capacity pressure to avoid the formation of water vapour inside the fitting
- Comes complete with 2M flex & plug
- IP66 rated
- 50,000 hour lifespan
- 3 year warranty

## Specifications

|                            |                                  |
|----------------------------|----------------------------------|
| <b>SKU</b>                 | VBLFL-150W-4-40                  |
| <b>Luminaire efficacy</b>  | 95 lm/W                          |
| <b>EAN</b>                 | 9340994017013                    |
| <b>Light Colour</b>        | Cool White                       |
| <b>Wattage</b>             | 150 W                            |
| <b>Lumen output</b>        | 14250 lm                         |
| <b>IP rating</b>           | 66                               |
| <b>CRI</b>                 | 80                               |
| <b>Beam Angle</b>          | 70 Degrees                       |
| <b>Trim colour</b>         | Black                            |
| <b>Length</b>              | 353 mm                           |
| <b>Width</b>               | 47 mm                            |
| <b>Height</b>              | 316 mm                           |
| <b>Lifespan</b>            | 50000 Hours                      |
| <b>Warranty</b>            | 3 Years                          |
| <b>LED source</b>          | Smalite                          |
| <b>Material</b>            | Powder coated die-cast aluminium |
| <b>Lamp Type</b>           | LED                              |
| <b>Input voltage</b>       | 220V-265V AC 50hz                |
| <b>Wiring method</b>       | Flex & Plug                      |
| <b>Weatherproof</b>        | Weatherproof                     |
| <b>Working temperature</b> | -30°C ~ 45°C                     |
| <b>Box Qty</b>             | 4                                |
| <b>Kelvin</b>              | 4000K                            |



## Dimensional Drawings

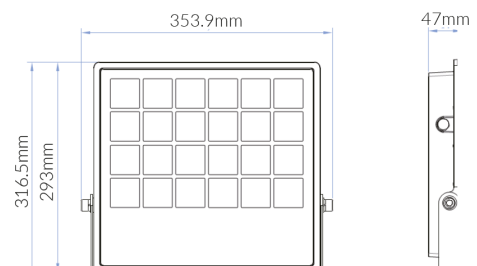

Photometric information available upon request.