



VBLFL-20W-4-CW



Two distinctive features of this 20W Cool White floodlight range include uniquely designed reflector cells which provide low glare and prohibit any light spillage onto neighboring businesses or surrounding residential properties. The other standout feature is a breather valve located on the side of the floods which stops moisture entering the fitting, reducing condensation and prolonging the life of the flood.

Features & Benefits


- Advanced input under/over voltage protection for improved reliability
- Equipped with SMALITE high voltage LED chips
- Available in Black trim only
- Breather valve allows to adjust the floodlights capacity pressure to avoid the formation of water vapour inside the fitting
- Comes complete with 600mm cable
- IP66 rated
- 50,000 hour lifespan
- 2 year warranty

Specifications

| | |
|----------------------------|-------------------|
| SKU | VBLFL-20W-4-CW |
| Luminaire efficacy | 100 lm/W |
| EAN | 9340994025261 |
| Light Colour | Cool White |
| Wattage | 20 W |
| Lumen output | 2000 lm |
| IP rating | 66 |
| CRI | 70 |
| Beam Angle | 110 Degrees |
| Trim colour | Black |
| Length | 160 mm |
| Width | 20 mm |
| Height | 147 mm |
| Lifespan | 50000 Hours |
| Warranty | 2 Years |
| Mounting type | Surface |
| LED source | Smalite |
| Lamp Type | LED |
| Input voltage | 220V-240V AC 50HZ |
| Wiring method | Hardwire |
| Weatherproof | Weatherproof |
| Working temperature | -30 to 45 degrees |
| Kelvin | 4000K |



Dimensional Drawings

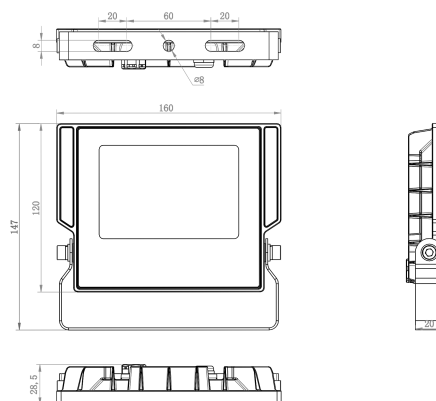

Photometric information available upon request.