



# 750W MODULAR LED FLOODLIGHT 60DEG BEAM ANGLE 5000K (D)


#### VBLFL-600-750W4-50



VIBE 600 Series Modular Stadium Lights range from 250W to 1000W and are equipped with Integral Drivers. (Remote drivers and weatherproof drivers can be supplied upon request.) Please contact your Sales Representative to discuss your specific project requirements for a tailored stadium solution.

### **Features & Benefits**

- Also available in 250W / 500W / 1000W
- Temperature colour: Natural White
- \* All models come with Integral Drivers\*
- Equipped with high voltage LED Chips
- Modular design
- IP66 rated
- 50,000 hour lifespan
- 5 year warranty
- \*Remote drivers and weatherproof enclosures can be supplied upon request.
- Cable lengths to be advised by customer lead times will apply.

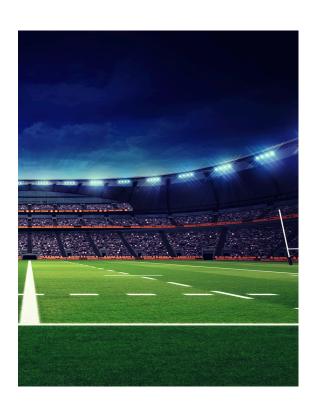

## 750W MODULAR LED FLOODLIGHT 60DEG BEAM ANGLE 5000K (D)

## **VBLFL-600-750W4-50**

## **Specifications**

| SKU                 | VBLFL-600-750W4-50                        |
|---------------------|---|
| Luminaire efficacy  | 130 lm/W                                  |
| EAN                 | 9340994021058                             |
| Weight              | 28  |
| Light Colour        | Natural White                             |
| Wattage             | 750 W                                     |
| Lumen output        | 97500 lm                                  |
| IP rating           | 66  |
| IK Rating           | 10  |
| CRI                 | 70  |
| Beam Angle          | 60 Degrees                                |
| Trim colour         | Black                                     |
| Length              | 764 mm                                    |
| Width               | 136 mm                                    |
| Height              | 510 mm                                    |
| Lifespan            | 50000 Hours                               |
| Warranty            | 5 Years                                   |
| Mounting type       | Surface                                   |
| Accessories         | Base, Laser, Glare Guard & Slip<br>Filter |
| Lamp Type           | LED                                       |
| Input voltage       | 220V-240V AC 50HZ                         |
| Wiring method       | Hardwire                                  |
| Weatherproof        | Weatherproof                              |
| Working temperature | -20°C ~ 45°C                              |
| Kelvin              | 5000K                                     |



**Dimensional Drawings** 



Photometric information available upon request.