



## 54W 240V LED FLOOD RGB BLACK WITH REMOTE CTRL

### VBLFL-836-4-RGB



Vibe's 54W RGB Floodlight is ideal for all event lighting. It's a lightweight, stylish and patented RGB floodlight. It adopts ADC12 die-casting aluminum to ensure fast heat dissipation, by using 3in1 RGB chip and high electroplated reflector, the light is more uniform, soft, pure, saturated and brilliant. Controlled by 24 key remote controller, it is easy and convenient to make the color change, very suitable for residential, gardens, hotel walls and architecture. It is a true color floodlight that creates perfect lighting atmosphere.

### Features & Benefits

- 3 in 1 RGB chip, purer and uniform color, better light output
- Input voltage 220 240V, built in color mode, plug and play, no need for converters and controllers, simple and convenient
- Electroplated reflector, high reflective efficiency, no color distortion
- 70° reflector, small angle light casting, saturated and colorful
- 70° reflector, small angle light casting, saturated and colorful
- anti condensation valve design, balancing the internal and external pressure of the floodlight.... the entire light waterproof level is up to IP66.

#### CONTROLLER:

- 24 key remote control, choose any color at will
- 6 8 meters remote control distance, easy to control
- 15 steps dimming, different color/brightness optional, to



create a perfect lighting atmosphere

# 54W 240V LED FLOOD RGB BLACK WITH REMOTE CTRL


VBLFL-836-4-RGB

## Specifications

<b>SKU</b>	VBLFL-836-4-RGB
<b>Luminaire efficacy</b>	32 lm/W
<b>EAN</b>	9340994029283
<b>Weight</b>	1
<b>Light Colour</b>	RGB
<b>Wattage</b>	54 W
<b>Lumen output</b>	1710 lm
<b>IP rating</b>	66
<b>IK Rating</b>	8
<b>Beam Angle</b>	70 Degrees
<b>Width</b>	197 mm
<b>Height</b>	181 mm
<b>Lifespan</b>	50000 Hours
<b>Warranty</b>	3 Years
<b>Dimmable</b>	Non-Dimmable
<b>Constant current/voltage</b>	Constant Current
<b>Shatterproof</b>	Shatterproof
<b>Mounting type</b>	Hook, Wall Bracket, Pole
<b>LED source</b>	Juxing
<b>Lamp Type</b>	LED
<b>Input voltage</b>	220-240V / 50Hz
<b>Diffuser</b>	Transparent
<b>Wiring method</b>	Flex & Plug
<b>Weatherproof</b>	Weatherproof
<b>Working temperature</b>	-20~+45
<b>Box Qty</b>	16
<b>Depth</b>	35
<b>Pallet Qty</b>	700



## Dimensional Drawings

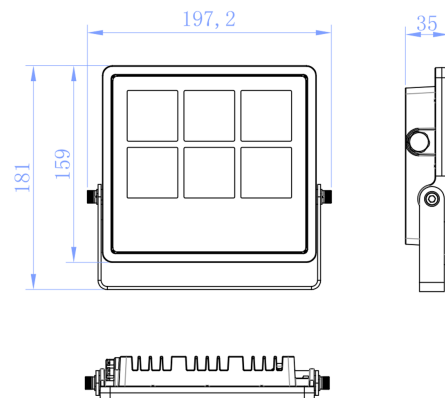

Photometric information available upon request.