



150W 5K LED STREET LT c/w S/FITTER 20KV PE READY (D)


VBLSL-420-4-150W-50



This VIBE 150W LED Shoebox Street Light emits a significant 20,250 lumens per fitting. At 5000K, with an IP66 weather rating, and IK10 impact rating, they are an excellent outdoor options where both vandalism and weather may be of concern. Please Note: All VIBE LED Street Lights are recommended to be mounted securely to a plinth/concrete base and not covered by any organic materials (dirt/mulch/sand ect) to avoid condensation entering and subsequently corroding the fitting. Not following this installation recommendation will void any stated warranty.

Features & Benefits

- Equipped with energy efficient SEOUL SMD LED Chips
- \bullet Hollow heat sync design increases more airflow for better heat dissipation 40 \sim 45°C
- High lumen efficiency 135 LM/W
- Die-casting aluminium housing, treated by anodic oxidation making it corrosion resistant
- PECELL ready
- 20KV Surge protection
- IP66 & IK10 rated
- 50,000 hour lifespan
- 5 year warranty

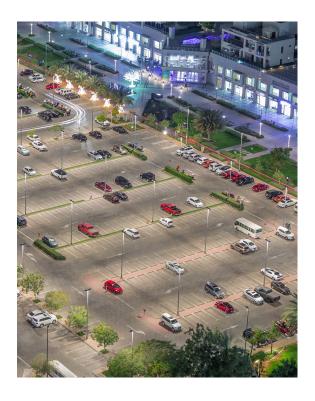



150W 5K LED STREET LT c/w S/FITTER 20KV PE READY (D)

VBLSL-420-4-150W-50

Specifications

Luminaire efficacy EAN 9340994026770 Light Colour Natural White Wattage 150 W Lumen output 120250 Im IP rating 65 IK Rating 8 CRI Trim colour Black Length 321 mm Width 520 mm Lifespan 50000 Hours Warranty 5 Years LED source SMD Material Accessories U Brackets & Photocell Sensor Lamp Type Input voltage Weatherproof Working temperature -20 to 45 degrees	81/11	VD 01 400 4 150W 50
EAN Light Colour Natural White Wattage 150 W Lumen output 1P rating 65 IK Rating CRI 80 Trim colour Black Length 321 mm Width 520 mm Lifespan 50000 Hours Warranty 5 Years LED source Material Die Cast Aluminum Accessories Lamp Type Input voltage Wiring method Weatherproof Weatherproof	SKU	VBLSL-420-4-150W-50
Light Colour Wattage Lumen output IP rating IK Rating CRI Trim colour Length Width S20 mm Lifespan S0000 Hours Warranty LED source Material Accessories Lamp Type Input voltage Weatherproof Natural White 20250 lm 80 Rating 80 Trim colour Black 321 mm 520 mm 520 mm 5un 5un 5un 5un 5un 5un 5un 5	Luminaire efficacy	135 lm/W
Wattage 150 W Lumen output 20250 lm IP rating 65 IK Rating 8 CRI 80 Trim colour Black Length 321 mm Width 520 mm Lifespan 50000 Hours Warranty 5 Years LED source SMD Material Die Cast Aluminum Accessories U Brackets & Photocell Sensor Lamp Type LED Input voltage 220V-240V AC 50HZ Wiring method Hardwire Weatherproof	EAN	9340994026770
Lumen output IP rating IK Rating CRI Trim colour Length Width 520 mm Lifespan 50000 Hours Warranty LED source Material Accessories Lamp Type Input voltage Wiring method Weatherproof Weatherproof 188 80 Raterial 80 Show 80 Show 80 Show 80 Show 80 Black 520 mm 520 mm 520 mm 54 54 54 55 56 56 67 68 68 68 68 68 68 68 68 6	Light Colour	Natural White
IP rating 65 IK Rating 8 CRI 80 Trim colour Black Length 321 mm Width 520 mm Lifespan 50000 Hours Warranty 5 Years LED source SMD Material Die Cast Aluminum Accessories U Brackets & Photocell Sensor Lamp Type LED Input voltage 220V-240V AC 50HZ Wiring method Hardwire Weatherproof	Wattage	150 W
IK Rating 8 CRI 80 Trim colour Black Length 321 mm Width 520 mm Lifespan 50000 Hours Warranty 5 Years LED source SMD Material Die Cast Aluminum Accessories U Brackets & Photocell Sensor Lamp Type LED Input voltage 220V-240V AC 50HZ Wiring method Hardwire Weatherproof	Lumen output	20250 lm
CRI Trim colour Black Length 321 mm Width 520 mm Lifespan 50000 Hours Warranty 5 Years LED source Material Die Cast Aluminum Accessories U Brackets & Photocell Sensor Lamp Type Input voltage Wiring method Weatherproof Weatherproof	IP rating	65
Trim colour Length 321 mm Width 520 mm Lifespan 50000 Hours Warranty 5 Years LED source SMD Material Die Cast Aluminum Accessories U Brackets & Photocell Sensor Lamp Type Input voltage 220V-240V AC 50HZ Wiring method Weatherproof	IK Rating	8
Length 321 mm Width 520 mm Lifespan 50000 Hours Warranty 5 Years LED source SMD Material Die Cast Aluminum Accessories U Brackets & Photocell Sensor Lamp Type LED Input voltage 220V-240V AC 50HZ Wiring method Hardwire Weatherproof	CRI	80
Width 520 mm Lifespan 50000 Hours Warranty 5 Years LED source SMD Material Die Cast Aluminum Accessories U Brackets & Photocell Sensor Lamp Type LED Input voltage 220V-240V AC 50HZ Wiring method Hardwire Weatherproof	Trim colour	Black
Lifespan 50000 Hours Warranty 5 Years LED source SMD Material Die Cast Aluminum Accessories U Brackets & Photocell Sensor Lamp Type LED Input voltage 220V-240V AC 50HZ Wiring method Hardwire Weatherproof	Length	321 mm
Warranty 5 Years LED source SMD Material Die Cast Aluminum Accessories U Brackets & Photocell Sensor Lamp Type LED Input voltage 220V-240V AC 50HZ Wiring method Hardwire Weatherproof	Width	520 mm
LED source Material Die Cast Aluminum Accessories Lamp Type Input voltage Viring method Weatherproof Weatherproof Material Die Cast Aluminum U Brackets & Photocell Sensor LED LED Hardwire Weatherproof	Lifespan	50000 Hours
MaterialDie Cast AluminumAccessoriesU Brackets & Photocell SensorLamp TypeLEDInput voltage220V-240V AC 50HZWiring methodHardwireWeatherproofWeatherproof	Warranty	5 Years
Accessories Lamp Type Input voltage Wiring method Weatherproof U Brackets & Photocell Sensor LED 220V-240V AC 50HZ Hardwire Weatherproof	LED source	SMD
Lamp Type Input voltage 220V-240V AC 50HZ Wiring method Hardwire Weatherproof Weatherproof	Material	Die Cast Aluminum
Input voltage 220V-240V AC 50HZ Wiring method Hardwire Weatherproof Weatherproof	Accessories	U Brackets & Photocell Sensor
Wiring method Hardwire Weatherproof Weatherproof	Lamp Type	LED
Weatherproof Weatherproof	Input voltage	220V-240V AC 50HZ
	Wiring method	Hardwire
Working temperature -20 to 45 degrees	Weatherproof	Weatherproof
	Working temperature	-20 to 45 degrees
Kelvin 5000K	Kelvin	5000K



Photometric information available upon request.