8W LED SURFACE MOUNT DOWNLIGHT BLACK 2CCT (3K/4K) IP44 TRIAC DIMMABLE

VBLSM-151-4-CCT

| 90° | IP44 | Dimmable |

Upgrade your lighting with the 8W 2CCT Surface Mounted LED Downlight in Black. This sleek downlight features dual color temperature options (3000K warm white and 4000K cool white) to suit any ambiance. With TRIAC dimmable functionality, you can easily customize the brightness to fit your space. Its IP44 rating provides protection against dust and moisture, making it perfect for various indoor applications, including damp areas. Offering both modern design and efficient performance, this downlight seamlessly combines style and functionality for any lighting setup. Key Features • 2CCT Switchable - 3000K/4000K

• Equipped with high effi ciency SMD LED chips
• Constructed from robust polycarbonate material
• Corrosion resistant
• Built-in internal driver
• Suitable for coastal homes, outdoor spaces & marine environments
• Designed for easy installati on & low maintenance
• Triac-Dimmable
• Supplied with Aus fl ex & plug
• IP44 rated
• 50,000 hour lifespan
• 3 year warranty

Features & Benefits

• 2CCT Switchable - 3000K/4000K
• Equipped with high effi ciency SMD LED chips
• Constructed from robust polycarbonate material
• Corrosion resistant
• Built-in internal driver
• Suitable for coastal homes, outdoor spaces & marine environments
• Designed for easy installati on & low maintenance
• Triac-Dimmable
• Supplied with Aus fl ex & plug
• IP44 rated
• 50,000 hour lifespan
• 3 year warranty

• 2CCT Switchable - 3000K/4000K
• Equipped with high effi ciency SMD LED chips

8W LED SURFACE MOUNT DOWNLIGHT BLACK 2CCT (3K/4K) IP44 TRIAC DIMMABLE

VBLSM-151-4-CCT

Specifications

SKU	VBLSM-151-4-CCT
Light Colour	2CCT
Wattage	8 W
Lumen output	738 LM (3K), 807 LM (4K) lm
IP rating	44
CRI	80
Beam Angle	90 Degrees
Trim colour	Black
Diameter	115 mm
Width	115 mm
Height	77 mm
Lifespan	50,000 Hours
Warranty	3 Years
Dimmable	Dimmable
Mounting type	Surface
LED source	SMD
Material	Polycarbonate
Lamp Type	LED
Dimming	Triac Dimming
Weatherproof	Indoor Use Only
Kelvin	3000K/4000K
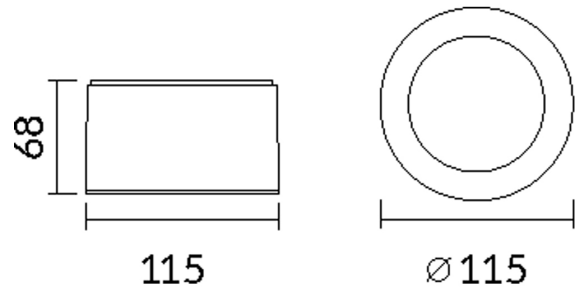
Photometric information available upon request.

Dimensional Drawings

68

115

⌀115