



## 18W 4000K LED 3CCT TRACK LIGHT- BLACK BODY 2500LM (D)

### VBLTL-350-4-4K



These 18W, 4000K, Black, Elegant 3 Circuit Track Lights come standard with a 50° reflector. If you're looking for reliability these lights are perfect with instant on, zero flicker technology, boasting a 50,000 hour lifespan all backed by a 5 year warranty.

### Features & Benefits

- Three Circuit LED Track Light allows independent switching
- Equipped with CITIZEN LED chips with high luminaire efficacy (Up to 130LM/W)
- CRI 90+ for better colour rendering
- Some modules available as Triac dimmable
- Available in White or Black trim colour
- 355° rotation and 180° tilt
- Instant on, no flickering
- 50,000 hours lifespan
- 5 years warranty



# 18W 4000K LED 3CCT TRACK LIGHT-BLACK BODY 2500LM (D)


**VBTL-350-4-4K**

## Specifications

|                            |  |
|----------------------------|--|
| <b>SKU</b>                 | VBTL-350-4-4K                                      |
| <b>Luminaire efficacy</b>  | 138.8 lm/W   |
| <b>Track type</b>          | 3 Circuit  |
| <b>EAN</b>                 | 9340994407098                                      |
| <b>Light Colour</b>        | Cool White   |
| <b>Wattage</b>             | 18 W   |
| <b>Lumen output</b>        | 2500 lm  |
| <b>IP rating</b>           | 20   |
| <b>CRI</b>                 | 90   |
| <b>Beam Angle</b>          | 40 Degrees   |
| <b>Trim colour</b>         | Black  |
| <b>Diameter</b>            | 103 mm   |
| <b>Length</b>              | 145 mm   |
| <b>Height</b>              | 184 mm   |
| <b>Lifespan</b>            | 50000 Hours  |
| <b>Warranty</b>            | 5 Years  |
| <b>Dimmable</b>            | Non-Dimmable                                       |
| <b>Mounting type</b>       | Track  |
| <b>LED source</b>          | Citizen  |
| <b>Material</b>            | High Strength Aluminium                            |
| <b>Accessories</b>         | Optional 20° & 70° beam angle reflectors available |
| <b>Lamp Type</b>           | LED  |
| <b>Input voltage</b>       | 220V-240V AC 50HZ                                  |
| <b>Weatherproof</b>        | Non-weatherproof                                   |
| <b>Working temperature</b> | -20°C ~ 50°C                                       |
| <b>Kelvin</b>              | 4000K  |



## Dimensional Drawings

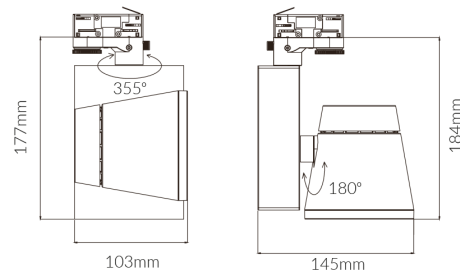

*Photometric information available upon request.*