



## 3W LED RECESSED WALL LT IP65 4K-SILVER OPEN FACE (D)

### VBLWL-101A-3-4K



Available in Open Face or Grill Face versions in either Silver or Black colour, these 3W compact IP65 rated Exterior Wall Lights are available in 3000K or 4000K and have an inbuilt driver, a 50,000 hour lifespan with a 5 year warranty.

### Features & Benefits

- UV stabilised polyester powder coating, resistant to corrosive environments
- Equipped with OSRAM LED Chips and hEP Integral Driver
- Optimal thermal management guarantees a long lifespan
- Eco friendly LED technology, energy efficient and low maintenance
- Anti Dazzle front trim design provides a better glare control effect
- Suitable for exterior walls and stairways
- Available in silver or black trim colour, Open Face or Grill Face
- 50,000 hours lifespan
- 5 year warranty

## 3W LED RECESSED WALL LT IP65 4K-SILVER OPEN FACE (D)


**VBLWL-101A-3-4K**

### Specifications

|                            |                   |
|----------------------------|-------------------|
| <b>SKU</b>                 | VBLWL-101A-3-4K   |
| <b>Luminaire efficacy</b>  | 58.57 lm/W        |
| <b>EAN</b>                 | 9340994405186     |
| <b>Light Colour</b>        | Cool White        |
| <b>Wattage</b>             | 3.5 W             |
| <b>Lumen output</b>        | 205 lm            |
| <b>IP rating</b>           | 65                |
| <b>CRI</b>                 | 90                |
| <b>Beam Angle</b>          | 85 Degrees        |
| <b>Trim colour</b>         | Silver            |
| <b>Length</b>              | 96 mm             |
| <b>Height</b>              | 96 mm             |
| <b>Lifespan</b>            | 50000 Hours       |
| <b>Warranty</b>            | 5 Years           |
| <b>Dimmable</b>            | Non-Dimmable      |
| <b>Mounting type</b>       | Recessed          |
| <b>LED source</b>          | Osram Olson       |
| <b>Lamp Type</b>           | LED               |
| <b>Input voltage</b>       | 220V-240V AC 50HZ |
| <b>Weatherproof</b>        | Weatherproof      |
| <b>Working temperature</b> | -20°C ~ 50°C      |
| <b>Kelvin</b>              | 4000K             |



### Dimensional Drawings

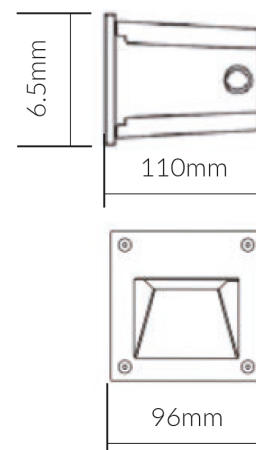

*Photometric information available upon request.*