




VBLWPB-4-40W-CCT



Our 40W VBLWPB SERIES LED Weatherproof Battern offers ideal linear lighting in large spaces, such as warehouses, supermarkets and carparks. This LED Weatherproof Battern is made with Samsung SMD LED Chips, is switchable between 3000K, 4000K and 5000K and generates 4269 lumens. With an IP65 rating and an IK10 resistance rating, this is an ideal fitting for outdoors & areas prone to acts of vandalism. Holes are provided on the stainless steel clips - these can be used in conjunction with high security screws for extra protection. Includes a 50,000 hour lifespan and 5 year warranty.

Features & Benefits

- Lightweight, rugged PC housing with shatterproof polycarbonate opal diffuser
- High brightness SAMSUNG SMD LEDs
- Vandal resistant stainless steel clips
- \bullet Holes provided on stainless steel clips for use with high security screws for added protection*
- IP65 rated
- IK10 (impact rating)
- 50,000 hours lifespan
- 5 years warranty

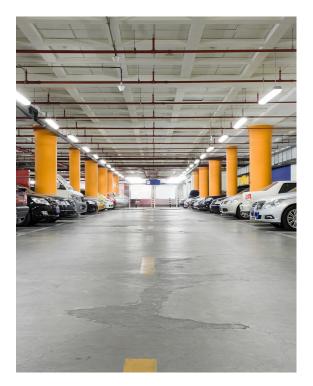

Specifications

SKUVBLWPB-4-40W-CCTLuminaire efficacy107 lm/WEAN9340994025315Light Colour3CCTWattage40 WLumen output4269 lmILmen output65IK Rating10CRI80Beam Angle120 DegreesLength1193 mmHeight90 mmHeight50000 HoursIf Faranty5 YearsDimmableNon-DimmableLED sourceSMDMaterialPCLamp TypeLEDImput voltage220-240V / 50HzWirting methodHardwireWatherproof200 to 45 degrees		
EAN9340994025315Light Colour3CCTWattage40 WLumen output4269 ImIP rating65IK Rating10CRI80Beam Angle120 DegreesLength94 mmWidth94 mmHeight50000 HoursWarranty5 YearsDimmableNon-DimmableMounting typeCeiling, SuspendedLED sourceSMDMaterialPCLamp TypeLEDWiring methodHardwireWeatherproofWeatherproof	SKU	VBLWPB-4-40W-CCT
Light ColourScreecessionLight ColourSCCTWattage40 WLumen output4269 ImIP rating65IK Rating10CRI80Beam Angle120 DegreesLength94 mmWidth94 omHeight50000 HoursWarranty5 YearsDimmableNon-DimmableMounting typeCeiling, SuspendedLED sourceSMDMaterialPCImput voltage220-240V / 50HzWiring methodHardwireWeatherproofWeatherproof	Luminaire efficacy	107 lm/W
Wattage40 WLumen output4269 lmIP rating65IK Rating10CRI80Beam Angle120 DegreesLength1193 mmWidth94 mmHeight50000 HoursIfespan50000 HoursDimmableSon-DimmableMounting typeCeiling, SuspendedLED sourceSMDLamp TypeLEDInput voltage220-240V / 50HzWeatherproofWeatherproof	EAN	9340994025315
Lumen output4269 lmIP rating65IK Rating10CRI80Beam Angle120 DegreesLength94 nmWidth94 nmHeight50000 HoursLifespan50000 HoursDimmableNon-DimmableMounting typeCeiling, SuspendedLED sourceSMDLamp TypeLEDInput voltage220-240V / 50HzWeatherproofWeatherproof	Light Colour	3CCT
IP rating1200 mmIP rating65IK Rating10CRI80Beam Angle120 DegreesLength1193 mmWidth94 mmHeight90 mmLifespan50000 HoursWarranty5 YearsDimmableNon-DimmableMounting typeCeiling, SuspendedLED sourceSMDMaterialPCLamp TypeLEDInput voltage220-240V / 50HzWeatherproofWeatherproof	Wattage	40 W
It ratingitIK Rating10CRI80Beam Angle120 DegreesLength1193 mmWidth94 mmHeight90 mmLifespan50000 HoursWarranty5 YearsDimmableNon-DimmableLED sourceSMDMaterialPCLamp TypeLEDInput voltage220-240V / 50HzWeatherproofWeatherproof	Lumen output	4269 lm
CRI80Beam Angle120 DegreesLength1193 mmWidth94 mmHeight90 mmLifespan50000 HoursWarranty5 YearsDimmableNon-DimmableMounting typeSMDLED sourceSMDLamp TypeLEDInput voltage220-240V / 50HzWiring methodWeatherproof	IP rating	65
Beam Angle120 DegreesLength1193 mmWidth94 mmHeight90 mmLifespan50000 HoursWarranty5 YearsDimmableNon-DimmableMounting typeCeiling, SuspendedLED sourceSMDMaterialPCLamp TypeLEDInput voltage220-240V / 50HzWeatherproofWeatherproof	IK Rating	10
Length1193 mmWidth94 mmHeight90 mmLifespan50000 HoursWarranty5 YearsDimmableNon-DimmableMounting typeCeiling, SuspendedLED sourceSMDMaterialPCLamp TypeLEDInput voltage220-240V / 50HzWeatherproofWeatherproof	CRI	80
Width94 mmHeight90 mmLifespan50000 HoursWarranty5 YearsDimmableNon-DimmableMounting typeCeiling, SuspendedLED sourceSMDMaterialPCLamp TypeLEDInput voltage220-240V / 50HzWiring methodWeatherproof	Beam Angle	120 Degrees
Height90 mmLifespan50000 HoursWarranty5 YearsDimmableNon-DimmableMounting typeCeiling, SuspendedLED sourceSMDMaterialPCLamp TypeLEDInput voltage220-240V / 50HzWiring methodHardwireWeatherproofWeatherproof	Length	1193 mm
Lifespan50000 HoursWarranty5 YearsDimmableNon-DimmableMounting typeCeiling, SuspendedLED sourceSMDMaterialPCLamp TypeLEDInput voltage220-240V / 50HzWiring methodHardwireWeatherproofWeatherproof	Width	94 mm
Warranty5 YearsDimmableNon-DimmableMounting typeCeiling, SuspendedLED sourceSMDMaterialPCLamp TypeLEDInput voltage220-240V / 50HzWiring methodHardwireWeatherproofWeatherproof	Height	90 mm
DimmableNon-DimmableMounting typeCeiling, SuspendedLED sourceSMDMaterialPCLamp TypeLEDInput voltage220-240V / 50HzWiring methodHardwireWeatherproofWeatherproof	Lifespan	50000 Hours
Mounting typeCeiling, SuspendedLED sourceSMDMaterialPCLamp TypeLEDInput voltage220-240V / 50HzWiring methodHardwireWeatherproofWeatherproof	Warranty	5 Years
LED sourceSMDMaterialPCLamp TypeLEDInput voltage220-240V / 50HzWiring methodHardwireWeatherproofWeatherproof	Dimmable	Non-Dimmable
MaterialPCLamp TypeLEDInput voltage220-240V / 50HzWiring methodHardwireWeatherproofWeatherproof	Mounting type	Ceiling, Suspended
Lamp TypeLEDInput voltage220-240V / 50HzWiring methodHardwireWeatherproofWeatherproof	LED source	SMD
Input voltage220-240V / 50HzWiring methodHardwireWeatherproofWeatherproof	Material	PC
Wiring method Hardwire Weatherproof Weatherproof	Lamp Type	LED
Weatherproof Weatherproof	Input voltage	220-240V / 50Hz
	Wiring method	Hardwire
Working temperature -20 to 45 degrees	Weatherproof	Weatherproof
	Working temperature	-20 to 45 degrees

