



8W LED DOWNLIGHT WITH PIR SENSOR 3K/4K/5.3K NON DIM

VBLDL-188-1-CCT-S



The 8W LED Downlight with built-in PIR sensor offers smart motion-activated lighting, ideal for hallways, bathrooms, and utility areas. Featuring 3CCT switchable colour temperatures (3000K, 4000K, 5300K), it provides flexibility to suit various indoor settings. With an IP44 rating, it's suitable for damp areas and general indoor use. This non-dimmable fitting ensures consistent performance and energy efficiency with minimal maintenance.

Features & Benefits

- 8W LED Downlight
- 3CCT switchable: 3K/4K/5K
- Standard 90-100mm cutout
- CRI 80
- IP44 for indoor use
- With PIR sensor



8W LED DOWNLIGHT WITH PIR SENSOR 3K/4K/5.3K NON DIM


VBLDL-188-1-CCT-S

Specifications

SKU	VBLDL-188-1-CCT-S
EAN	9340994031774
Weight	.155
Light Colour	3CCT
Wattage	8 W
Lumen output	800/ 860 / 840 lm
IP rating	44
CRI	80
Beam Angle	100 Degrees
Trim colour	White
Cut out	90 - 100 mm
Diameter	115 mm
Height	71.4 mm
Lifespan	30000 Hours
Warranty	3 Years
Dimmable	Non-Dimmable
Mounting type	Recessed
LED source	SMD
Material	Aluminum coated Plastic
Lamp Type	LED
Input voltage	220-240V AC 50Hz
Wiring method	Flex & Plug
Working temperature	-20°C ~ 40°C
Box Qty	1
Kelvin	3000K / 4000K / 5000K



Dimensional Drawings

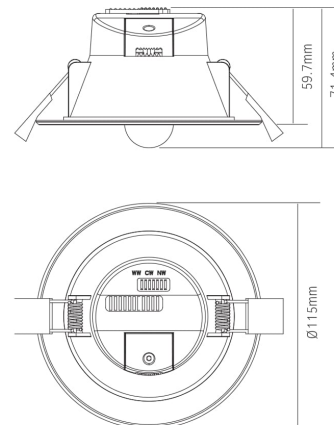

Photometric information available upon request.

Additional Information

• PIR Motion sensor:

- Detection Range: 4m
- Detection Angle: 100 degrees
- Duration Time: 2 minute, subsequent detection will restart the minute timer
- Manual override function: On/off twice then the light will stay on after going into manual override function, the light will stay on for 8 hours and after 8 hours past the light will go into AUTO mode (normal mode) and also if light set in manual override mode if turn the main power off for 30 seconds will turn off the manual override function. When turn on power again after 30 seconds the light will work as AUTO mode (normal mode)