


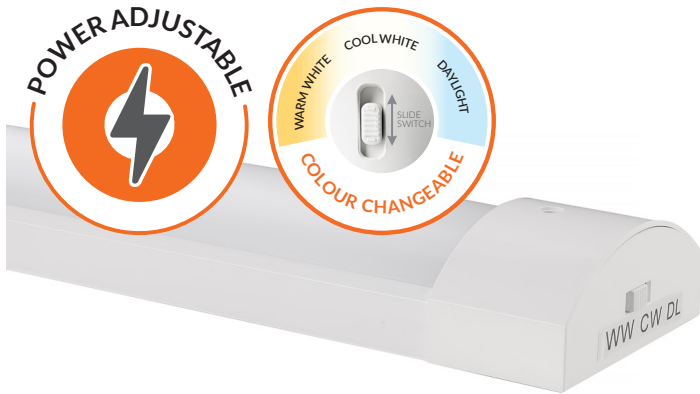

VBLB-SLIM-SERIES

3CCT Power Adjustable Slim LED Battens

The 3CCT Power Adjustable Slim LED Battens (2FT & 4FT) are a versatile, high-performance solution for commercial and industrial applications. Featuring selectable wattages—2FT (10W/20W) and 4FT (20W/40W)—and 3CCT switchable options (3000K/4000K/5700K), they offer complete lighting flexibility. Delivering up to 2600 lumens at 4000K/20W and 5200 lumens at 4000K/40W, they provide bright, uniform illumination with a wide 110° beam angle, ensuring consistent performance across offices, warehouses, retail spaces and more.

Designed for durability and easy installation, these LED battens feature conduit entry at both ends and BESA mounting compatibility for flexible setup. A robust steel body with a powder-coated finish ensures long-term reliability, while the opal diffuser delivers uniform, low-glare illumination. The integrated flicker-free driver enhances visual comfort, making them an ideal, energy-efficient replacement for fluorescent battens.

KEY FEATURES

- Slim, contemporary design
- Power Adjustable – 10/20W (2FT) & 20/40W (4FT)
- 3CCT Switchable – 3000K/4000K/5700K
- Conduit entry points at both ends
- Designed for BESA mounting
- Steel body construction with powder coat finish
- Unique opal diffuser design for optimum performance and light distribution
- Integrated flicker-free LED driver
- 50,000 hour lifespan
- 5 years warranty



SPECIFICATIONS

SKU	VBLB-2-PA-CCT-SLIM	VBLB-4-PA-CCT-SLIM
Power (W)	10/20	20/40
Efficacy (LM/W)	130	130
Lumens (LM)	2600 (@ 20W/4000K)	5200 (@ 40W/4000K)
Input Voltage (V)	220V-265 AC 50Hz	220V-265 AC 50Hz
Colour Temp	3CCT Switchable	3CCT Switchable
Kelvin	3000K/4000K/5700K	3000K/4000K/5700K
Dimmable	Non-Dimmable	Non-Dimmable
CRI	80	80
Beam Angle	110	110
IP Rating	20	20
IK Rating	06	06
Trim Colour	White	White
Weatherproof	Indoor Use Only	Indoor Use Only
Mounting Type	Surface	Surface
Length (MM)	600	1200
Width (MM)	84	84
Depth (MM)	37	37
Working Temp	-10°C ~ 45°C	-10°C ~ 45°C
Lifespan (HRS)	50,000	50,000
Warranty (YRS)	5	5

DIMENSIONAL DRAWING

