



100W/70W/50W LED FLOOD LIGHT

VBLFL-100W-1-PACCT



100W/70W/50W Wattage adjustable LED White Flood
3K/4K/6K CCT ADJUSTABLE IP65 With 1.5M Flex & Plug

Features & Benefits

- Advanced input under/over voltage protection for improved reliability
- Equipped with SMALITE high voltage LED chips
- 4mm tempered glass, high light transmittance
- Breather valve allows to adjust the floodlights capacity pressure to avoid the formation of water vapour inside the fitting
- Wattage and Colour Temperature selectable via dip switch
- Optional plug and play PIR sensor with remote control
- Comes complete with 1.5M flex & plug
- IP65 rated
- 50,000 hour lifespan
- 3 year warranty



100W/70W/50W LED FLOOD LIGHT


VBLFL-100W-1-PACCT

Specifications

SKU	VBLFL-100W-1-PACCT
Luminaire efficacy	110-130 lm/W
EAN	9340994032597
Weight	1.23
Light Colour	3CCT
Wattage	100W/70W/50W W
Lumen output	11000-13000 lm
IP rating	65
IK Rating	08
CRI	70
Beam Angle	120 Degrees
Trim colour	White
Length	225.2 mm
Width	35.9 mm
Height	184.9 mm
Lifespan	50000 Hours
Warranty	3 Years
Dimmable	Non-Dimmable
Mounting type	Surface
LED source	SMD
Material	Aluminium
Accessories	Plug and Play PIR Sensor
Lamp Type	LED
Input voltage	220-240V AC 50Hz
Wiring method	Flex & Plug
Weatherproof	Weatherproof
Working temperature	-30°C ~ 45°C
Box Qty	1
Kelvin	3000K/4000K/6000K
Power Adjustable	Yes



Dimensional Drawings

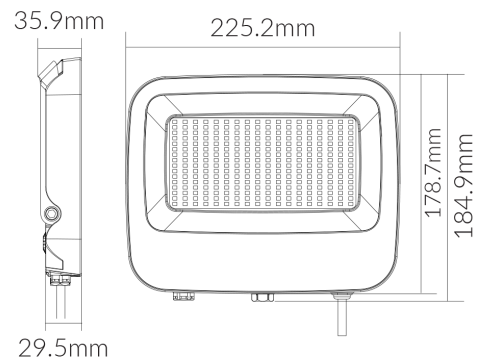

Photometric information available upon request.

Optional Plug and Play PIR Sensor with Remote Control. Preset at 100W.