



50W/30W/20W LED FLOOD 3K/4K/6K IP65 WITH 1.5M FLEX & PLUG, SENSOR INTERFACE

VBLFL-50W-4-PACCT



50W/30W/20W Wattage adjustable LED Flood 3K/4K/6K CCT
ADJUSTABLE IP65 With 1.5M Flex & Plug

Features & Benefits

- Advanced input under/over voltage protection for improved reliability
- Equipped with SMALITE high voltage LED chips
- 4mm tempered glass, high light transmittance
- Breather valve allows to adjust the floodlights capacity pressure to avoid the formation of water vapour inside the fitting
- Wattage and Colour Temperature selectable via dip switch
- Optional plug and play PIR sensor with remote control
- Comes complete with 1.5M flex & plug
- IP65 rated
- 50,000 hour lifespan
- 3 year warranty




50W/30W/20W LED FLOOD 3K/4K/6K IP65 WITH 1.5M FLEX & PLUG, SENSOR INTERFACE


VBLFL-50W-4-PACCT

Specifications

SKU	VBLFL-50W-4-PACCT
Luminaire efficacy	110-130 lm/W
EAN	9340994030579
Weight	0.72
Light Colour	3CCT
Wattage	50W/30W/20W W
Lumen output	5500-6500 lm
IP rating	65
IK Rating	8
CRI	70
Beam Angle	120 Degrees
Trim colour	Black
Length	164.7 mm
Width	35 mm
Height	123.6 mm
Lifespan	50000 Hours
Warranty	3 Years
Dimmable	Non-Dimmable
Mounting type	Surface
LED source	SMD
Material	ALUMINIUM
Accessories	Plug and Play PIR Sensor
Lamp Type	LED
Input voltage	220-240V / 50Hz
Wiring method	Flex & Plug
Weatherproof	Weatherproof
Working temperature	-30°C~45°C
Box Qty	20
Kelvin	3000K/4000K/6000K
Power Adjustable	Yes

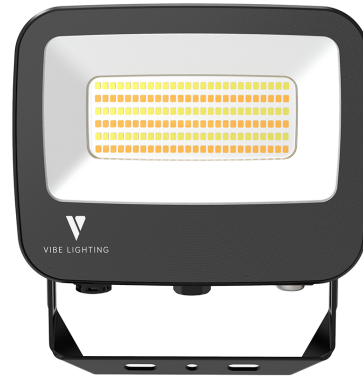

Dimensional Drawings

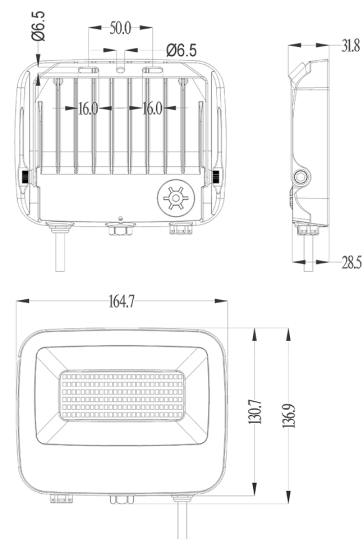

Photometric information available upon request.

Optional Plug and Play PIR Sensor with Remote Control. Preset at 50W